


SLIMTECH
EASY FLOATING FLOOR SYSTEM

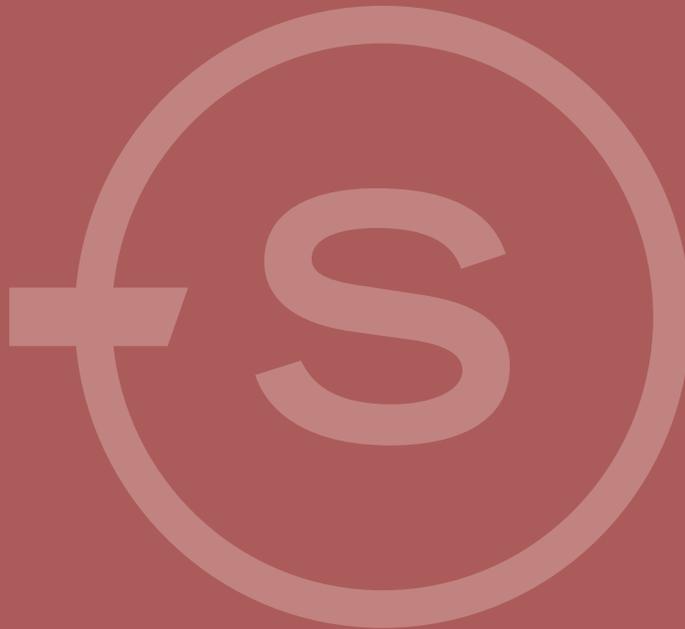

TECHNICAL INSTALLATION MANUAL

What the system is comprised of


1 SILENT SOUNDPROOFING MAT



Unroll and extend the base mat

After verifying that the subfloor is clean and level, proceed with laying the SILENT soundproofing mat on the entire floor area.

2 SLIMTECH plus

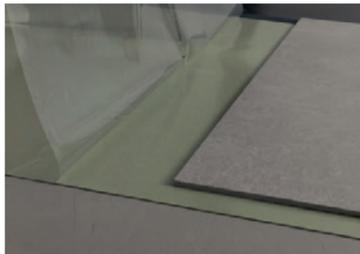

Lay the Slimtech slabs

Then lay the SLIMTECH slabs, chosen among the colours available in the **5plus** and **6plus** versions, directly on the mat without the use of adhesives.

3 FILLER FINISHING SEALANT



Seal the grout lines

After having laid SLIMTECH on the floor, it is necessary to seal the spaces between the slabs with FILLER. Once dry, this sealant guarantees a perfect walkable and waterproof surface.

1 SILENT SOUNDPROOFING MAT

SILENT is a plant based polyurethane decoupling mat with inert fillers. It has outstanding thermal conductive properties and, when used with Slimtech Plus, does an excellent job of reducing footfall noise as well.

It is a product without “memory”: once laid it immediately moulds to the shape of the support onto which it has been installed and does not maintain the wavy shape created by having been packaged in rolls. This trait makes it possible to significantly reduce installation times.

SILENT ensures a substantial degree of surface grip, a characteristic that is fundamental to ensuring that Slimtech Plus is laid properly. In fact, once a Slimtech Plus slab has been laid, it adheres very well to the mat while still allowing for subsequent adjustments.

The superficial part of the mat is protected by a transparent plastic film. This has two benefits:

- 1) It preserves the characteristics of the mat over time;
- 2) It makes it possible to lay the mat and to take off the protective film a little at a time as one proceeds with installation, rather than to have to move around a mat that gets stuck to the soles of one's shoes.



Primary Benefits

ACOUSTIC BENEFITS

The Slimtech Easy system is soundproofed, thanks to the combined action of the SILENT mat and Slimtech Plus. The system's soundproofing is equal to 17dB, which means that footfall noise transmitted to the lower floor is approximately 16 times less than that of a traditional ceramic floor laid using adhesives.

PRESERVES THE EXISTING FLOOR


The use of the SLIMTECH EASY system makes it possible to install on top of the existing floor.

ALLOWS FOR INSTALLATION WITHOUT JOINTS

Thanks to the use of the SILENT mat, the Slimtech Easy system can be installed without expansion joints even on critical surfaces like: mixed subfloors, under-floor heating systems, old ceramic subfloors, floors at constant risk of cracking, wooden supports, etc.

INSTALLATION ON HEATED/COOLED FLOORS

The Slimtech Easy system is perfect for installation on heated/cooled floors. That's because Slimtech Plus and SILENT are two materials with excellent thermal-conductive characteristics which, when combined with their reduced thickness, make EASY the best solution for cladding a radiant floor.

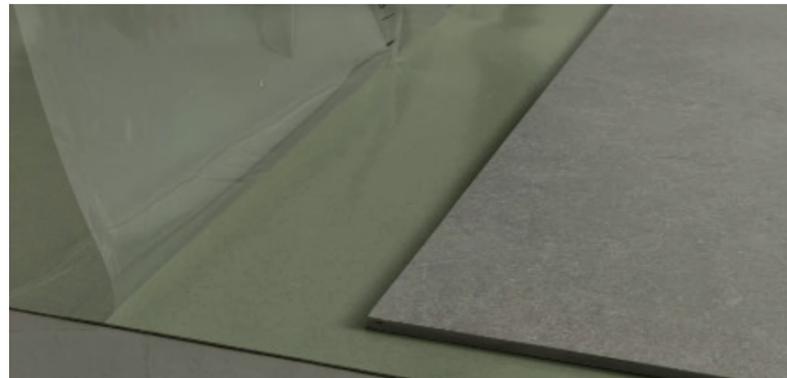


CAUTION

Before positioning the slabs, the mat's transparent protective film must be removed.

Slimtech Plus - laminated porcelain stoneware - is characterized by the extraordinary dimensions of the slabs, which reach the sizes 100x300 cm and 120x278 cm, and by the reduced thickness, from 3.5 mm to 6.5 mm.

The final product is light, resistant, versatile and easy to use. Slimtech Plus is a truly universal ceramic surface which is the fruit of Panariagroup's unrelenting research activity into beauty and technical excellence. It is ideal for numerous applications in the world of architecture and design and it is suitable for covering not only floors and walls, but also furniture, accessories, kitchens and countertops, ventilated façades and walls, tunnels and large public works.

For further information see Slimtech Technical Manual.

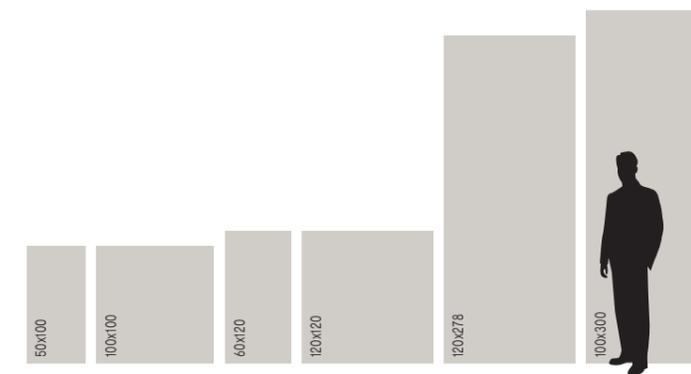

Ultrathin and ultraresistant

Reinforced with fibreglass mesh on the reverse side



Slimtech Easy can be used only with 5plus and 6plus slabs in all available sizes. Products with special finishes can have limitations depending on their area of application. Refer to specific collection catalogues.

3 FILLER

FILLER is a highly elastic and mould-resistant silicone sealer, suitable for movements up to 20%.

FILLER FINISHING SEALANT



FILLER, single-component silicone sealant, is easy to apply and optimally smoothable.

Thanks to its characteristics, it provides the following properties:

- excellent durability; the seal remains unchanged even after many years of exposure to weathering, industrial atmospheres, temperature fluctuations, and immersion in water;
- high elasticity;
- matte effect with a refined aesthetic result;
- excellent adhesion;
- delays mold formation in humid environments;
- waterproof and vapor-permeable;
- good resistance to chemical agents;
- flexible down to -40°C and resistant to temperatures up to $+200^{\circ}\text{C}$;
- easy to work with;
- compliant with numerous international standards;
- compliant with EN 15651-1, EN 15651-3 and CE marked.

PRIMARY BENEFITS

STABLE

The fiberglass mesh on the rear side of the laminated porcelain stoneware slabs combined with the use of the SILENT mat and FILLER sealant ensure the utmost durability and stability to the floor.

WATERPROOF

The combined use of laminated porcelain stoneware and FILLER sealant guarantees that the floor is entirely waterproof.

MORE BEAUTIFUL

The combined use of laminated porcelain stoneware, SILENT, and FILLER makes it possible to install a floor without expansion joints, which makes it more beautiful.

MATERIAL EFFECT

Sealed joints with FILLER can achieve a realistically material, non-glossy effect.

How to use the Slimtech Easy system efficiently

The installation of Slimtech Plus with the SLIMTECH EASY system includes all the phases starting from the design that lead to the final result. These activities are essentially the following:

- 1 PROJECT AND SUBSTRATE ANALYSIS AND PLANNING**
 Starting from the project design, the installer prepares and agrees with the client/project supervisor a schedule for the various installation phases. This schedule must take into account the time requirements of the various phases, as well as the timing for the curing required by certain materials (e.g. adhesives and levelling products).

 It is the installer's responsibility to formally point out to the client any inconsistencies between the design and the actual installation.
- 2 MONITORING OF ENVIRONMENTAL CONDITIONS**
 The working environment temperature must be between 5°C and 50°C to guarantee the proper application of the FILLER.
- 3 HANDLING, STORAGE AND CHECKING MATERIALS**
 On arrival at the construction site, the materials must be checked and stored. The installer must promptly and formally highlight any obvious defects. Defective materials must not be installed unless a formal written order has been received from the customer.
- 4 LAYING OF THE MAT, INSTALLATION AND CUTTING OF SLIMTECH PLUS**
 For the laying of the mat and the cutting of Slimtech Plus please refer to the dedicated technical sheet.

- 5 PREPARATION AND APPLICATION OF GROUTING JOINTS AND EXPANSION JOINTS**
 For preparation and application of grouting and expansion joints refer to the dedicated technical sheet.
- 6 POST-INSTALLATION CLEANING AND PROTECTION**
 It is the installer's responsibility to deliver the tiling clean in its entirety. After cleaning, the installer must also take care of protecting the tiling (with suitable systems) until its delivery to the client.
- 7 TESTING**
 The testing of tiling consists in the process of verifying the quality of the tiling itself. Testing is the responsibility of the client, and must be carried out before it is ready for use, in the presence of the designer and the installer.


 The client is entitled to draw up an acceptance report at the end of the testing period.
- 8 MAINTENANCE**
 The maintenance of the tiling to be carried out on laminated porcelain stoneware only includes cleaning operations. For cleaning methods refer to Slimtech technical manual.

For further information about the individual components please consult the technical data sheets.




Project Analysis: Suggestions for Creating a Laying Plan.

In order for the SLIMTECH EASY system to function properly, and to obtain the best aesthetic result, we recommend conducting a survey of the space before starting work and subsequently creating a laying plan which will be executed.

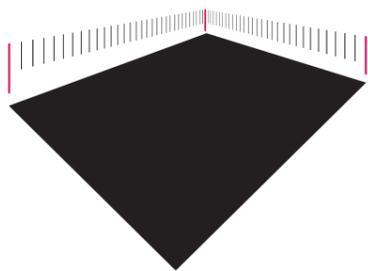



1 Measure the project room.

2 Note the size of the slabs which will be used.

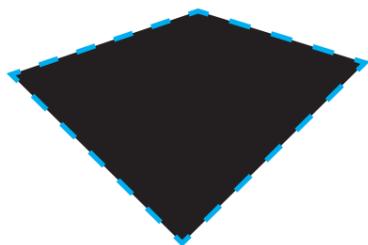




3 Consider an outer joint of approximately 5/8 mm.

4 Take into account the size of the grout lines when calculating the surface required, remembering that these will be at least 2 mm thick using FILLER.

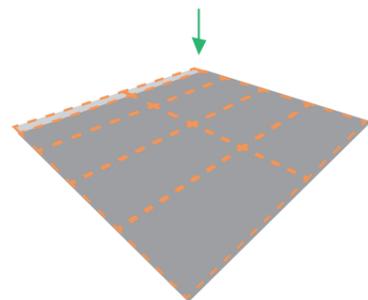


5 Check therefore whether it is necessary to make cuts in the slabs.

If the slab must be cut to less than half of its original size, trim the edges.

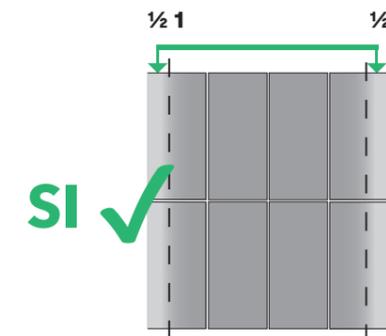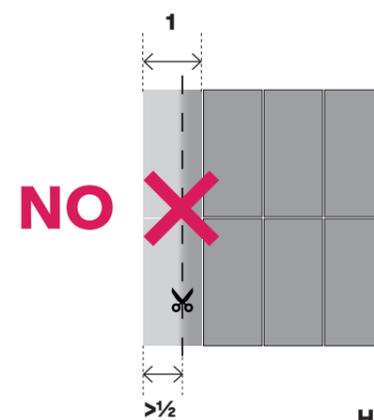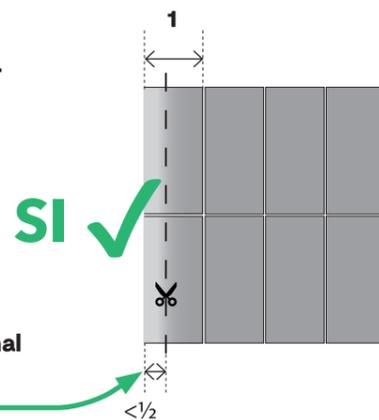

However, if the slab must be cut to less than half of its original size, then proceed by splitting the cut between the two sides of the space.

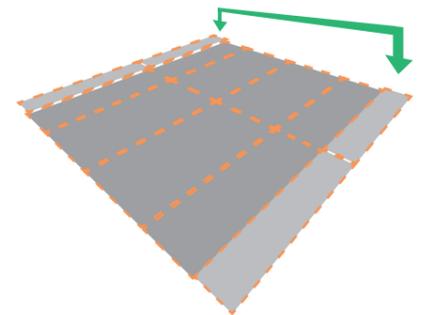

FOR AN OUTSTANDING AESTHETIC RESULT, FINISH THE FLOORING WITH SLABS CUT TO NO MORE THAN 50% OF THEIR ORIGINAL SIZE ON THE SHORT SIDE.

Analysis of Substrate

Slimtech Plus cladding with the SLIMTECH EASY system can be installed on any type of floor substrate as long as its design and construction has taken into account the necessary project requirements and respects current regulations.

Characteristics of the support

The substrate on which the product will be installed must have the characteristics detailed below. The assurance and the verification of these characteristics is the responsibility of the individual who designs and completes the project.

IMPORTANT

The Slimtech Easy system is a decoupled system, therefore it can also be used on supports that are not perfectly COMPACT (in terms of surface and thickness) or INTACT.

CLEAN

The surface of the support must be clean and free of impurities (for example cement slurry, penetrating oils, or traces/residue of paints adhesives, etc.). In the event that these are present, it is necessary to remove them with the appropriate products and methods.

STABLE AND DRY

The support must be stable and superficially dry. If the instructions of the producer of the screed are respected and if the rules of good building practice have been followed, then it is not necessary to test for residual moisture. If you wish to conduct the tests anyway, then you must remember that the mass of the residual moisture is determined through a measurement taken with a carbide hygrometer. Throughout the thickness of the substrate and for all measurements made, at least one for each room, the maximum percentage allowed must be:

- 3% for CT class screeds (cement based and special binding agents);
- 0.5% (0.3% in the case of substrates with radiant heating and cooling) for class CA screeds (based on calcium sulphate / anhydrite).

WARPAGE

Flatness of the support is checked by using a levelling rod with a length of at least 2 metres. Place the rod on the substrate in all directions. The permissible tolerance is 2 mm. If the surface does not meet the specified requirements, a levelling layer is required.

Analysis of Substrate: what to do if it is not flat?

If the substrate is not flat as indicated previously one must use adequate surface levelling products. Apart from the standard "wet" levelling solutions, with Slimtech Easy one can also use "dry" levelling solutions. This second method is only possible with Slimtech Easy.

Dry levelling system

The dry levelling system consists in laying compact plastic sheets to compensate for any differences in the surface level.

The sheets especially in the A4 size and with a thickness of 0.15mm are easily found in stationaries.

BEFORE INSTALLATION



If while checking the substrate issues are found in the flatness of the surface, they can be corrected by spreading where necessary the plastic sheets so as to obtain a flat substrate.

Once the substrate is flat proceed with the laying of the mat.

DURING AND AFTER INSTALLATION

The "dry" levelling system is simple and it is also possible to correct issues regarding the flatness of the surface even AFTER Slimtech Plus has been laid.

- 1) Remove the Slimtech Plus.
- 2) With a levelling rod or even simply a portion of a Slimtech Plus slab one can check for flatness.
- 3) Add the plastic sheets so as to compensate and flatten out the surface.
- 4) Lay back the Slimtech Plus slab.

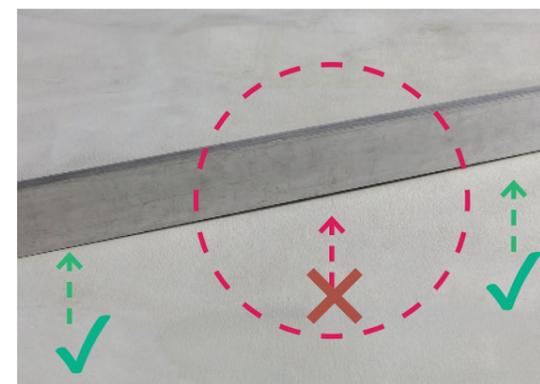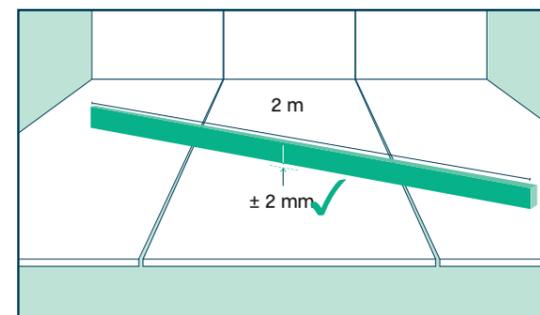

Planning the Work: the required tools


For installation of the system, the following tools are required:

- 1) Manual tile cutter / tools for working with Slimtech Plus
- 2) Cutter
- 3) Pencil
- 4) A ream of plastic sheets, size A4, preferably with a thickness of 0.15 mm, for correcting any potential unevenness in the support
- 5) 2 mm spacers
- 6) Filler Refiner or spray bottle with a mixture of water and dishwashing detergent (ratio 15:1)
- 7) Gun for applying the silicone. For larger projects, it is recommended the use of battery-powered guns for silicone

Control of materials

Checking the materials

The installer must check the materials before using them and must formally inform the client of any obvious defects promptly. Defective materials must not be installed unless a formal written order has been received from the customer.

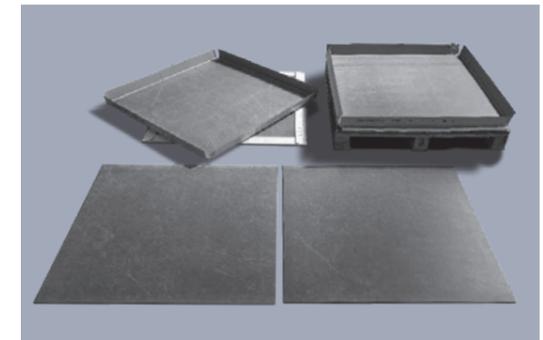

Laying of the Mat, Installing and Cutting Slimtech Plus


Laying of SILENT Mat



Lay the mat starting from the corner of the space.

Cut to size.

Position the Slimtech Plus Slabs

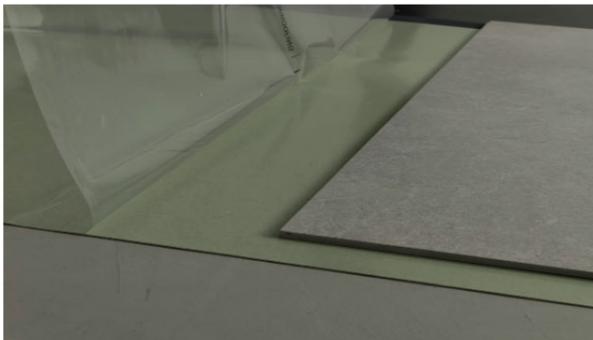

DO NOT remove completely the protective film. The film must be removed gradually while the Slimtech Plus slabs are being laid.





Lay the Slimtech Plus slabs, using spacers to distance them from each other.

The spacers will not be removed, but rather covered by the grout so be sure to push them down as far as possible.

Cut to size. Around the perimeter of the room, maintain a distance from the walls of approximately 5mm. This outer joint will then be covered by the skirting or can be filled with silicone like a normal grout line.



SLIMTECH EASY MUST BE LAID EXCLUSIVELY WITH A CONTINUOUS GROUT LINE

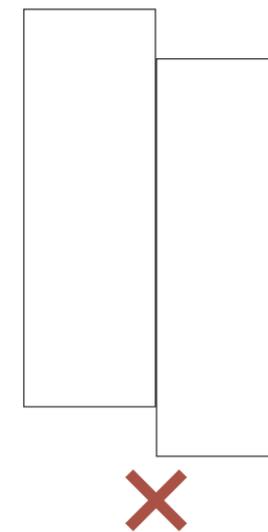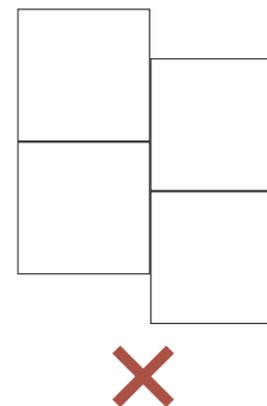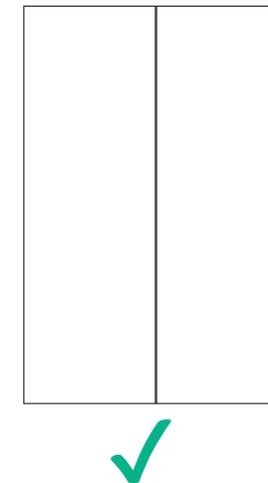

Cutting Slimtech Plus Slabs

For information regarding the cutting of the slabs refer to the instructions in the Slimtech Technical Manual. It is important to note that L-shaped slabs and slabs with holes drilled through cannot be used with Slimtech Easy.

FILLER

FINISHING SEALANT

Grouting

Grout Lines and Expansion Joints

GROUT LINES

So-called "zero grout line" installation is not recommended. The minimum size of the grout lines is 2 mm. The grouting and cleaning of the surface of laminated porcelain stoneware from residues of installation materials must be carried out in parallel and always following the instructions of the grout manufacturer, so that, at the end of grouting, the tiling is finished and clean.

INTERMEDIATE, EXPANSION AND PERIMETER JOINTS


The use of SLIMTECH EASY does NOT require structural and expansion joints. Meanwhile, outer joints, in correspondence with fixed elements in the bearing structure, must be placed along the perimeter of the tiling and must measure approximately 5-8 mm. This outer joint can be covered with skirting or filled with silicone like a normal grout line.



The use of 2mm spacers, which can be easily purchased, makes it possible and very simple to create uniform grout lines. The spacers will not be removed, but will rather be covered by the grout, so be sure to push them far enough down.

Grouting

FILLER is an acetic silicone that comes in cartridges, created to fill the grout lines of the SLIMTECH EASY system. FILLER serves two functions:
1) It makes the floor waterproof by sealing the Slimtech Plus slabs;
2) It serves as an expansion joint thanks to its elasticity.

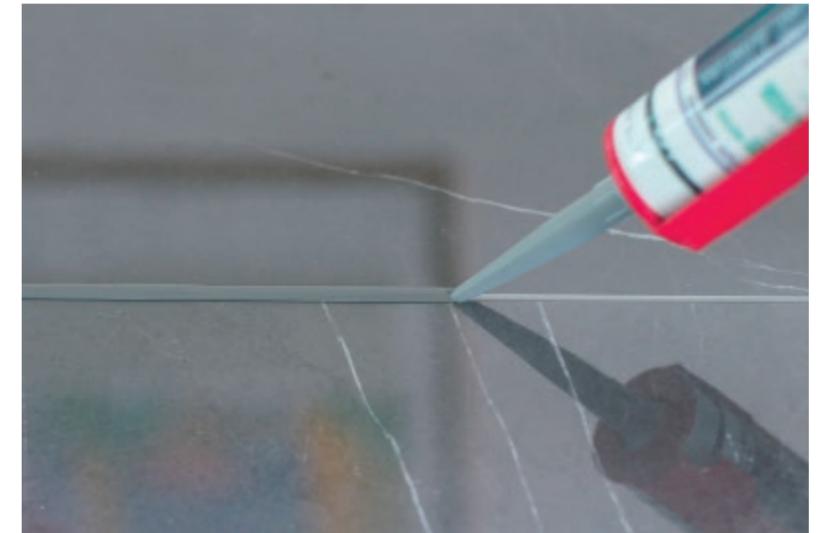

1 In order to apply the silicone, in cartridges, a silicone gun is required. The fluidity of the silicone makes it appropriate for use with either a manual silicone gun, more common and less expensive, or an electric gun, which is certainly more convenient when filling the grout lines of a large floor.

FILLER comes in 310 ml cartridges. To use cut the cartridge at the top of its thread. For grout lines of 2 mm, it is not necessary to cut the cartridge at the top of its thread; just screw on the nozzle, insert the cartridge in the gun, and extrude.

FILLER

FINISHING SEALANT

Grouting

REMOVING EXCESS SILICONE

The removal of the silicone MUST be done within 10 minutes of application so as to avoid hardening of the superficial part.

To remove partially reticulated FILLER from tools and surfaces, you can use common solvents (ethyl acetate, petrol, toluene). After it is fully reticulated, the silicone can only be removed mechanically.

When exposed to air, FILLER reticulates and becomes elastic due to the effect of the moisture in the air. The speed of its reticulation depends very little on temperature and is, instead, primarily dependent on the atmospheric moisture present. The reticulation process at +23°C and 50% atmospheric moisture will take 10-12 hours to fully harden.

NECESSARY TOOLS

Two tools are necessary for removing excess silicone:

- 1) Filler Refiner or spray bottle with a mixture of water and dishwashing detergent (ratio 15:1)
- 2) An empty cartridge of silicone used for the grouting. Remember to remove any residual silicone from the empty cartridge that may ooze out of the nozzle so as to avoid having this potentially drip onto the floor.

NOTE: with grout lines of 2mm, a cartridge will be used up after approximately 8 linear meters, therefore within the 10 minute time limit for cleaning the excess silicone.



2

Using the spray bottle, thoroughly FILLER REFINER spray the part of the grout line that is to be cleaned. Spray the rear extremity of the cartridge which will be used to pick up the excess silicone. Rest the cartridge against the grout line and scrape up the excess silicone. The excess silicone will remain inside the cartridge. Continue in this manner for the entire cleaning of the grouted area.

IMPORTANT:

Before wiping up the excess silicone, spray the soap and water solution onto the floor area and onto the nozzle of the empty cartridge each time.

If small crests or imperfections appear in the remaining silicone, spray some of the solution onto that area and onto your fingers. Then trace over the grout line with a finger.

Also In this case, remember to first spray the soap and water solution.

LIGHT FOOT TRAFFIC AND READY TO USE

The EASY system with FILLER grout is set for light foot traffic after approximately 6 hours and is ready for use after approximately 10-12 hours (calculated on the basis of +23°C and 50% atmospheric moisture).

WHEN THE SILICONE IS DRY, THOROUGHLY WASH THE FLOOR

Thoroughly wash and dry the floor.

The removal of the excess silicone leaves behind a significant amount of soap and water, which may look like streaks along the grout lines. A thorough washing will make the floor look perfect. Do not walk on the silicone before it is completely dry (approximately 12-18 hours, depending on the climatic conditions).



THANKS TO SLIMTECH EASY IT IS NOT NECESSARY TO CREATE STRUCTURAL OR EXPANSION JOINTS.

Post-installation cleaning

The installer must also provide clean tiling for any acceptance tests.

Post-installation cleaning is used to remove any FILLER residues from the joints and is absolutely mandatory at the end of the construction site.

Non-slip surfaces: due to their particular, non-slip, rough or structured textures, are more difficult to clean.

Therefore, we recommend paying particular attention to cleaning methods, specifically by intervening rapidly.

Protection

It is the installer's responsibility to protect the finished, clean tiling.

The protection of the ceramic covering for the period between the end of the installation and delivery to the client is all the more important when the environment in question will be subjected to significant foot traffic from other building operators (painters, electricians, bricklayers, etc..).

The protection of the slabs is carried out by applying suitable protective materials.

To avoid the formation of condensation which would cause problems with FILLER's reticulation, do not cover the freshly grouted surface with sheets or other materials.

For **FILLER** wait at least 10-12 hours depending on the temperature before protecting the surface.



IMPORTANT

The information and suggestions given in this manual are to be considered valid until the publication of a new one most recent update. The new update cancels all of the above. You can check for new ones updates on the website or by contacting the technical service company. The company reserves the right to make, if deemed it appropriate, technical and formal changes to what illustrated in this publication.

2026 EDITION

Company certifications



Product certifications and declarations for buildings



Discover more:

<https://www.panariagroup.it/en/innovation/laminated-porcelain/>

LEA

CERAMICHE

Via Cameazzo, 21
41042 Fiorano Modenese
Modena Italy

T +39 0536 837811
E info@leaceramiche.it
leaceramiche.com

PANARIAGROUP INDUSTRIE CERAMICHE S.p.A.